

Synthesis and properties of UV-curable polyurethane-acrylate composites using a tri-acrylate as crosslinking points


Hyo Jin Jung, Ji-Hong Bae, Kyung Seok Kang, Chan Hyuk Jee, Wonbin Lim, Byung Joo Kim, PilHo Huh
Department of Polymer Science and Engineering, Pusan National University, Busan 609-735, South Korea
* pilho.huh@pusan.ac.kr

Abstract


Thermoplastic photo-activating PU was successfully synthesized by the additional reaction of methylene diphenyl diisocyanate (MDI), poly(tetramethylene ether) glycol, and tri-acrylate derivatives as a crosslinking point. The crosslinked PU-acrylate elastomers were fabricated by the exposure to 200~400 μ m UV radiation. The structures and properties of the resulting acryl-PU were evaluated by fourier transform infrared spectroscopy (FT-IR), gel permeation chromatography (GPC), ultra violet spectroscopy (UV-Vis), differential scanning calorimetry (DSC), and universal testing machine (UTM). The increase of acrylate concentration in acryl-PU elastomers led to higher tensile strength and hardness due to the increased crosslinking density and the enhanced interchain hydrogen bonding.

Objective

1. To synthesize a Acryl-PU series composed of PTMG as a polyol and acrylate and MDI as an isocyanate
2. To evaluate the physical properties and reduce the photo-curing time of Acryl-PU
3. To compare the film as the UV curing progress

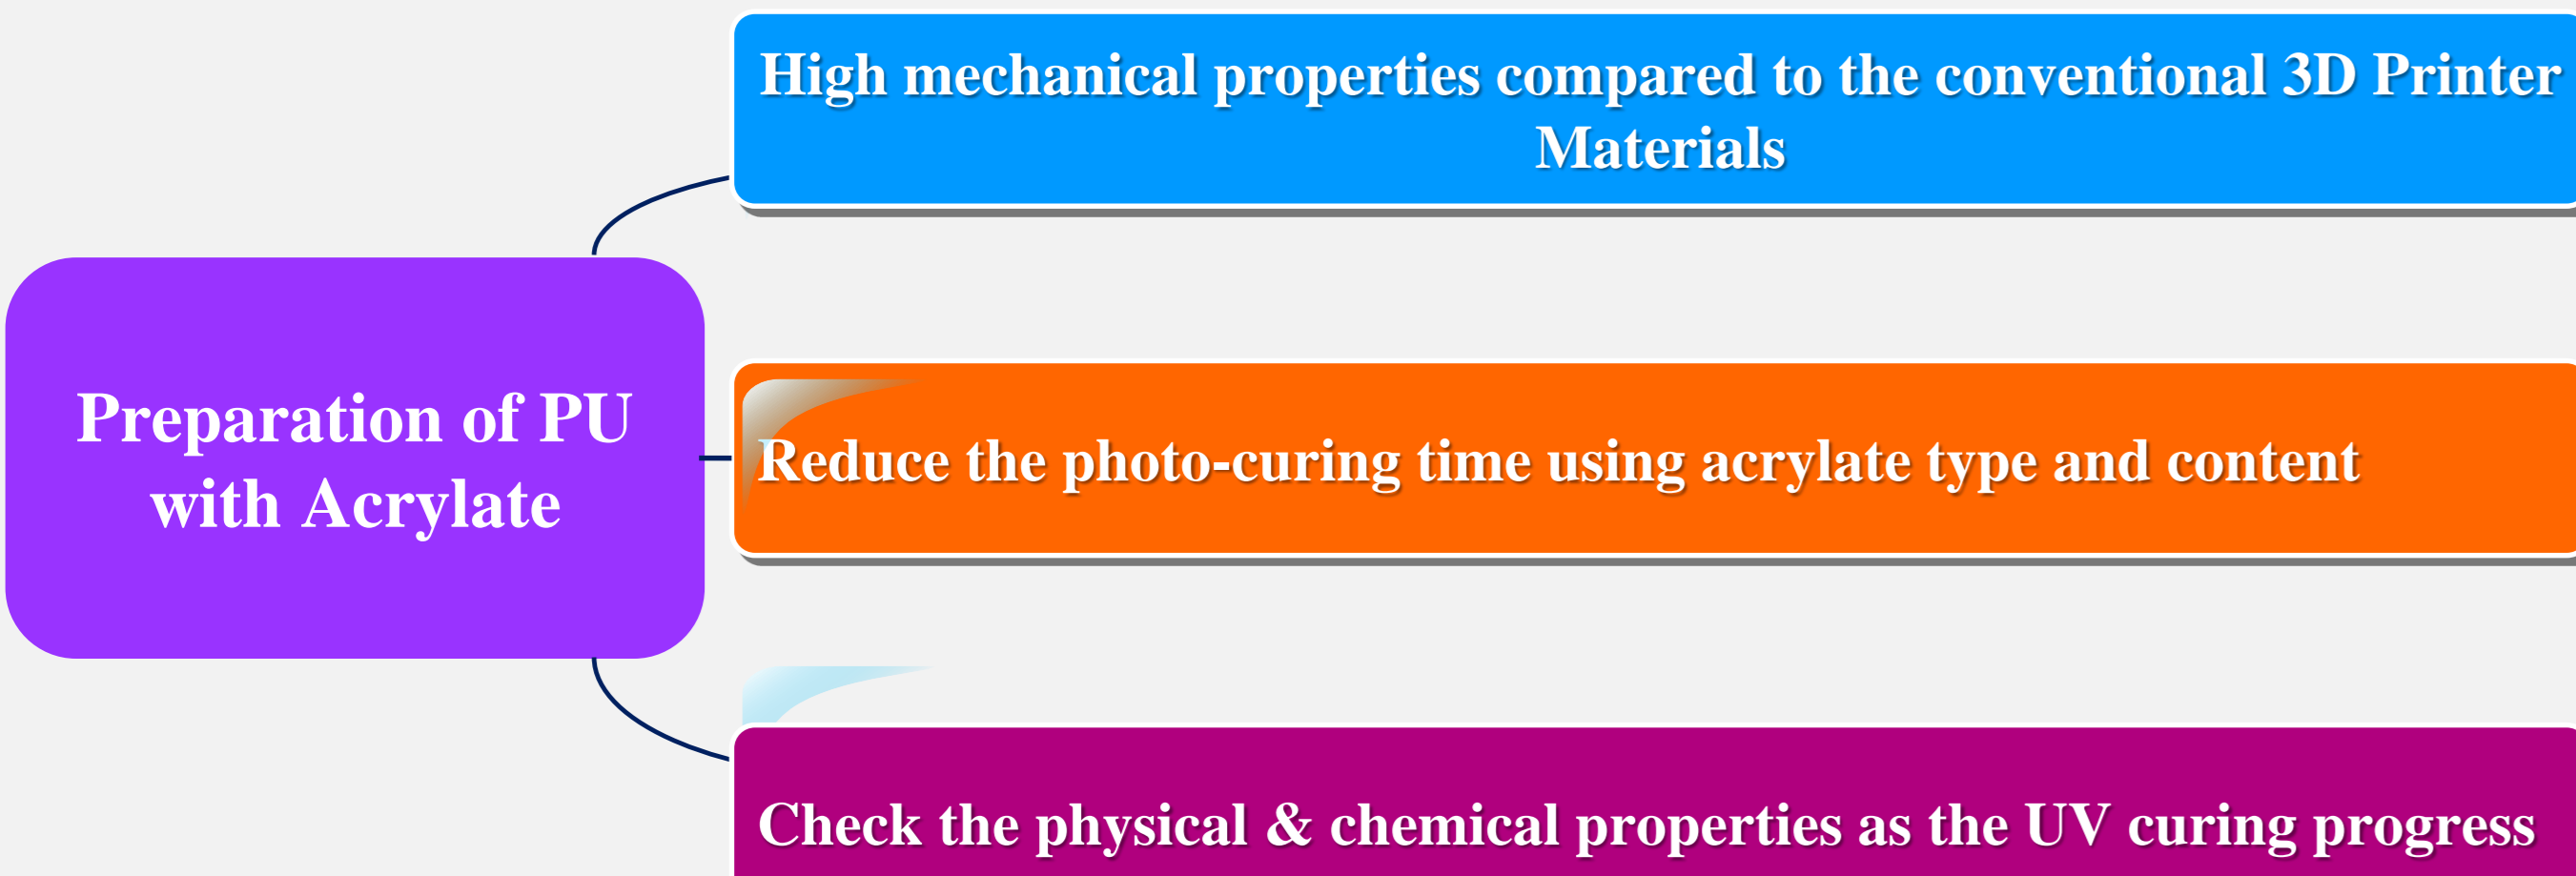


Experimental

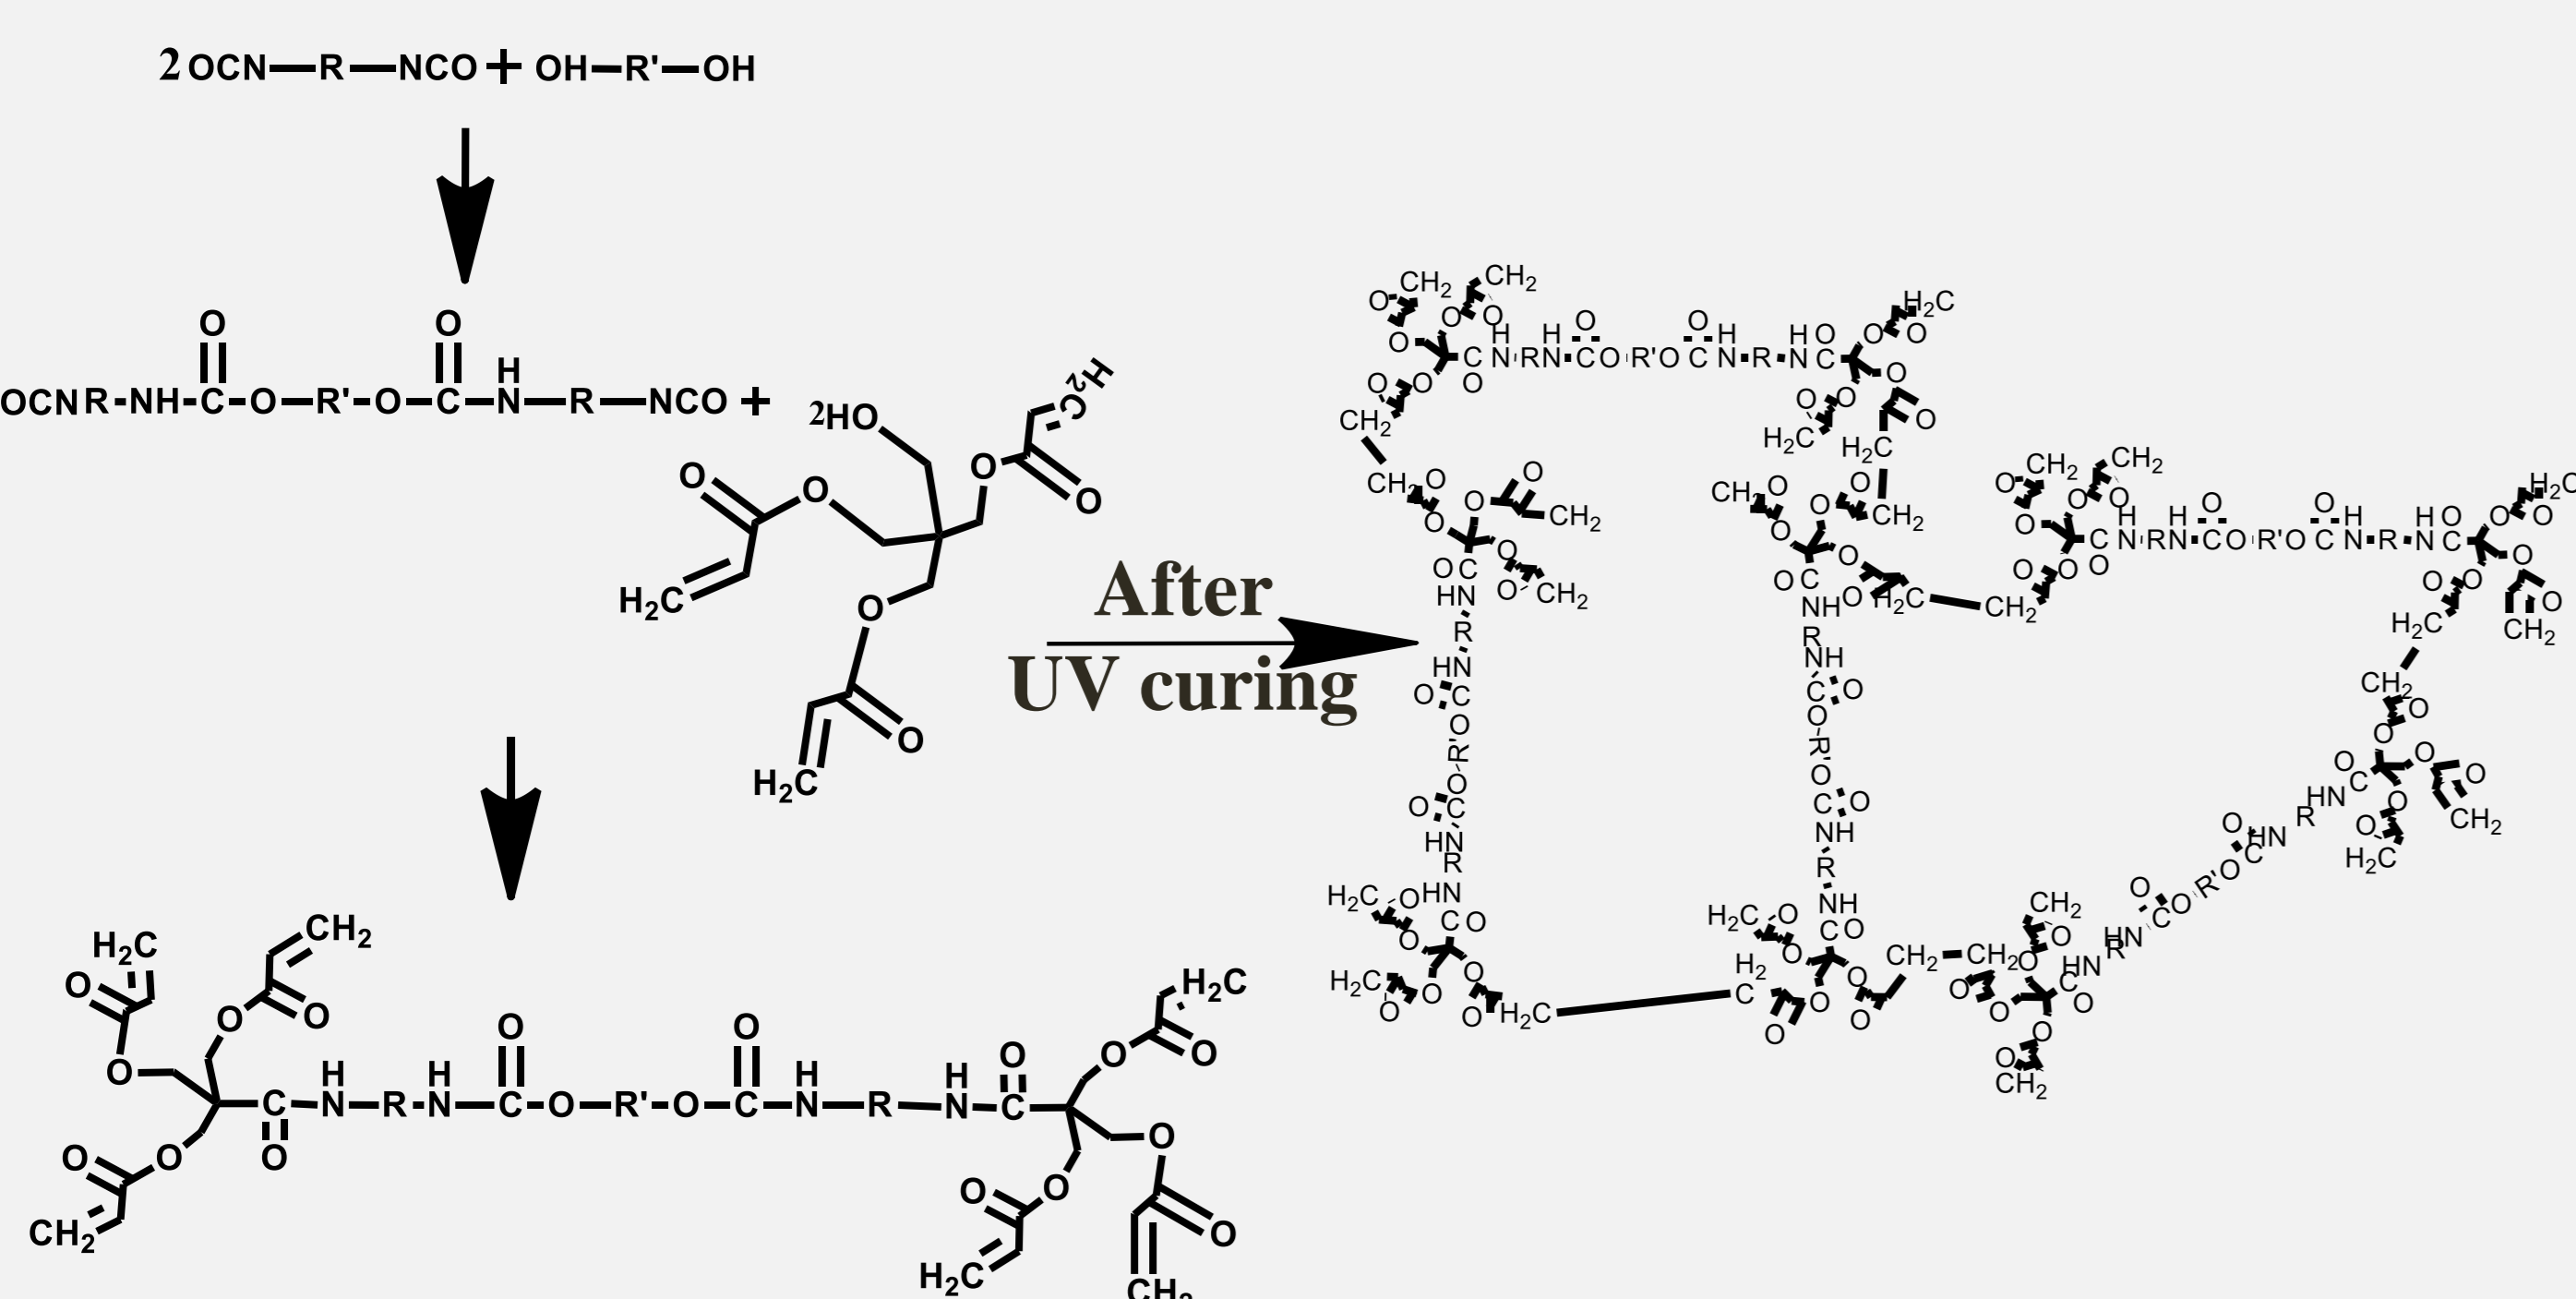


Results

GPC



	M _n	M _w	PDI
PUA 5	5257	11330	2.15
PUA 10	10200	27320	2.67

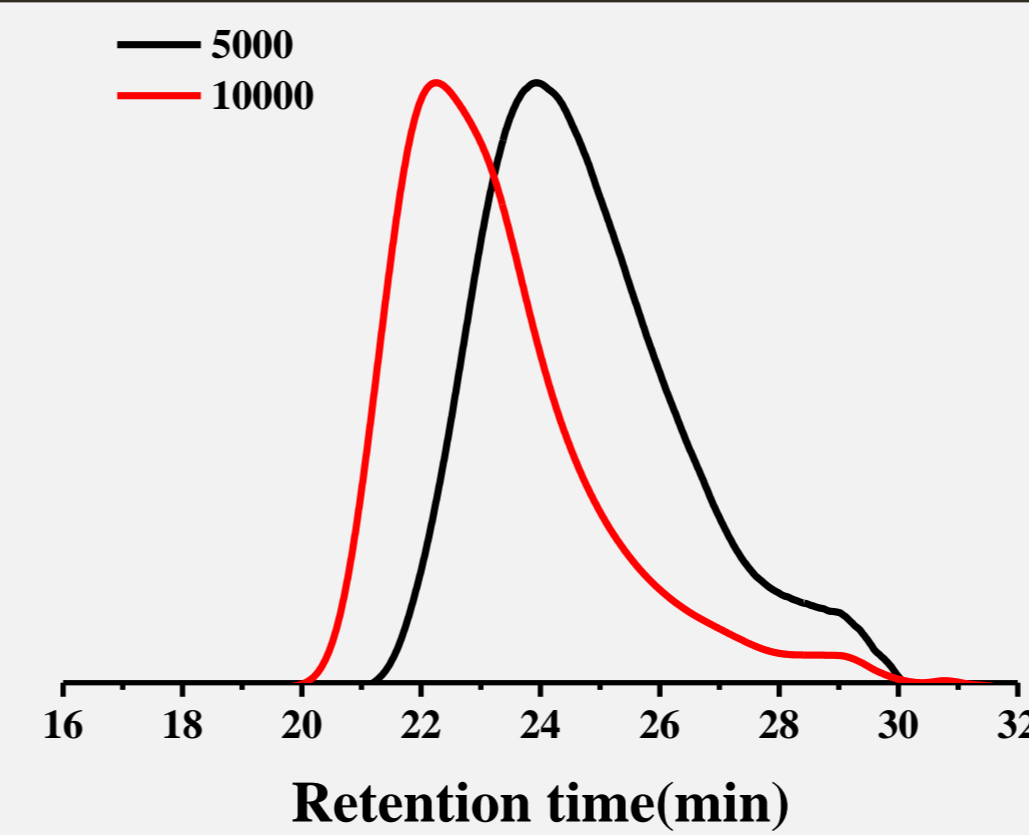



UV Transmittance

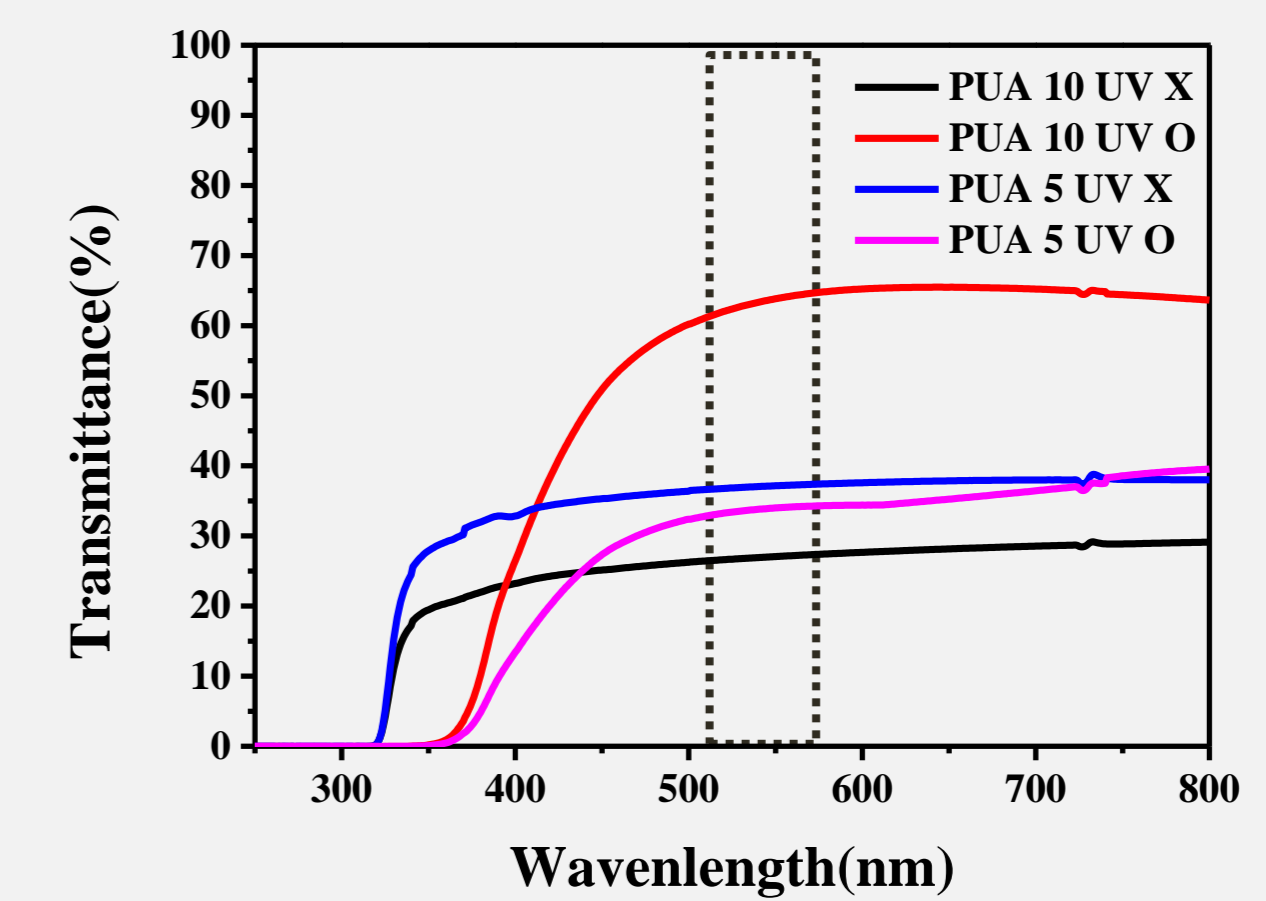

FT-IR

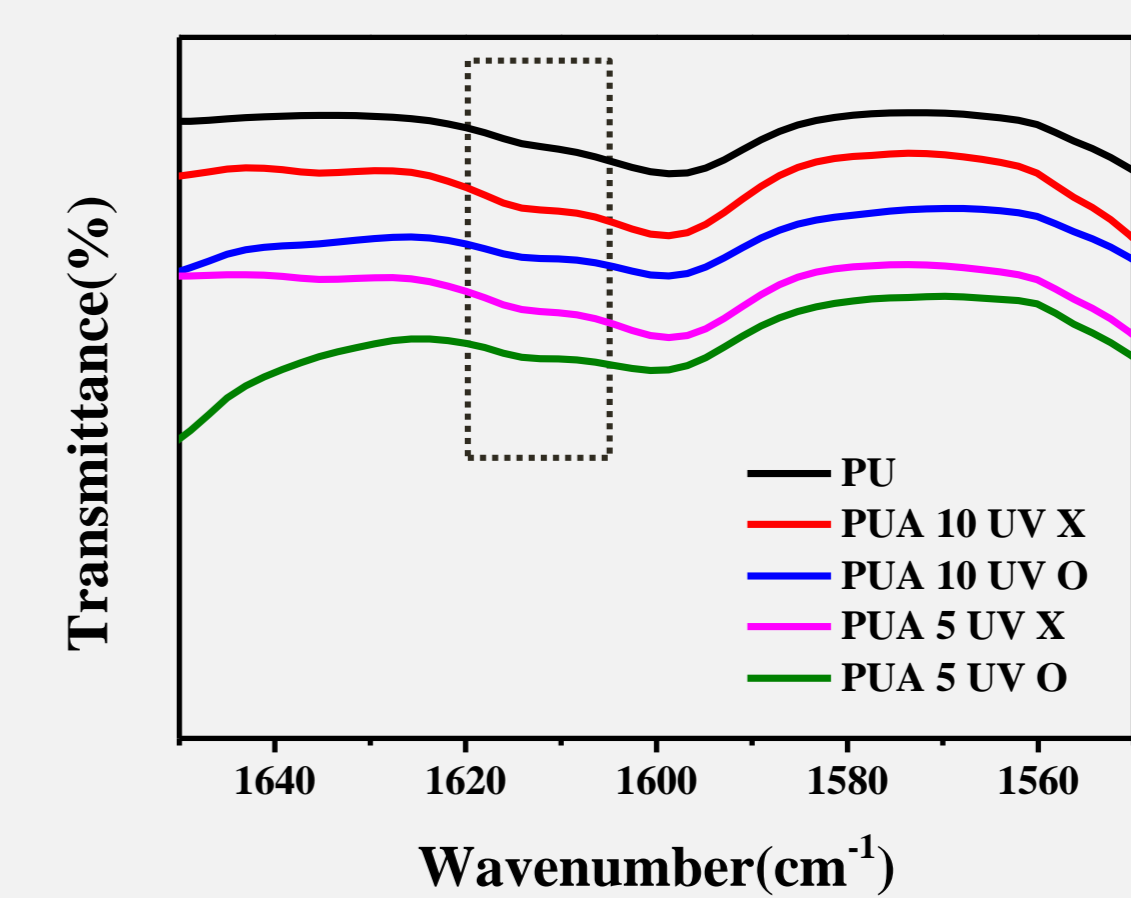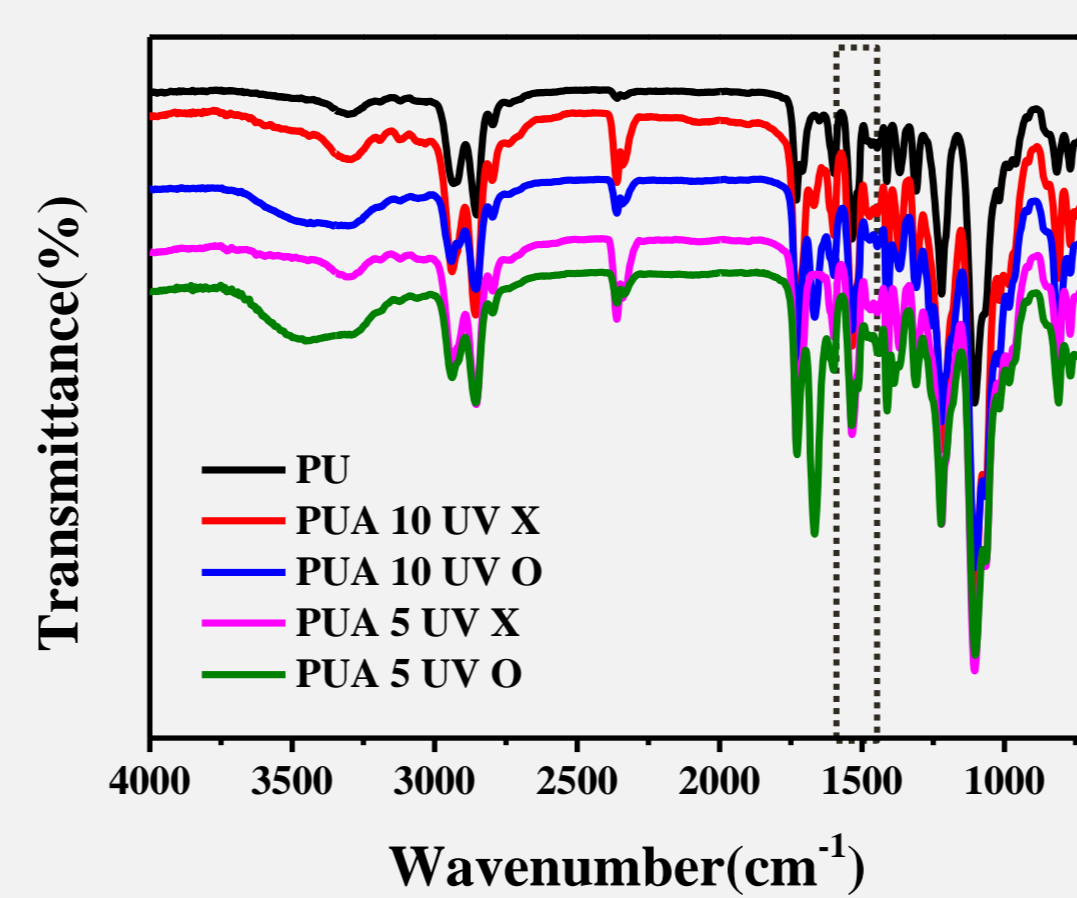


UTM

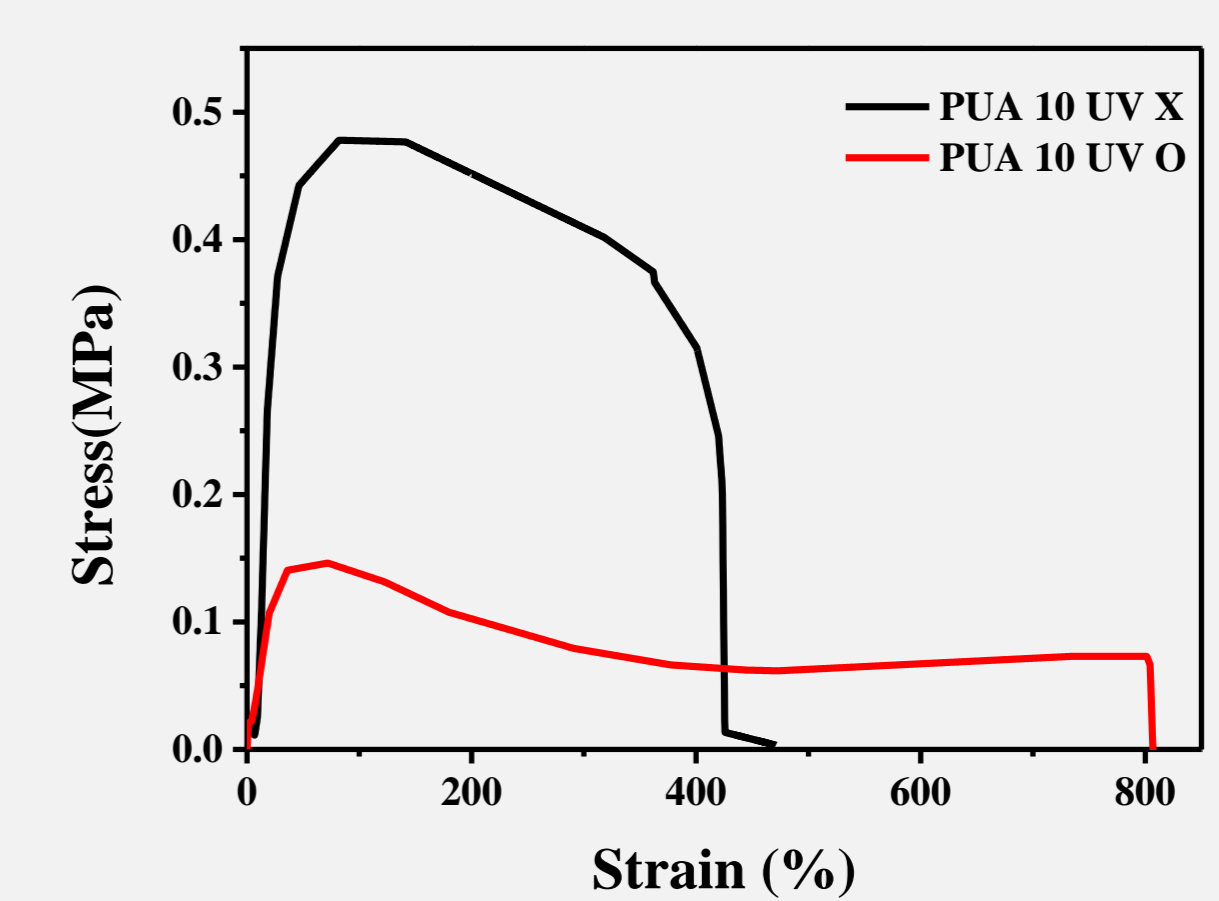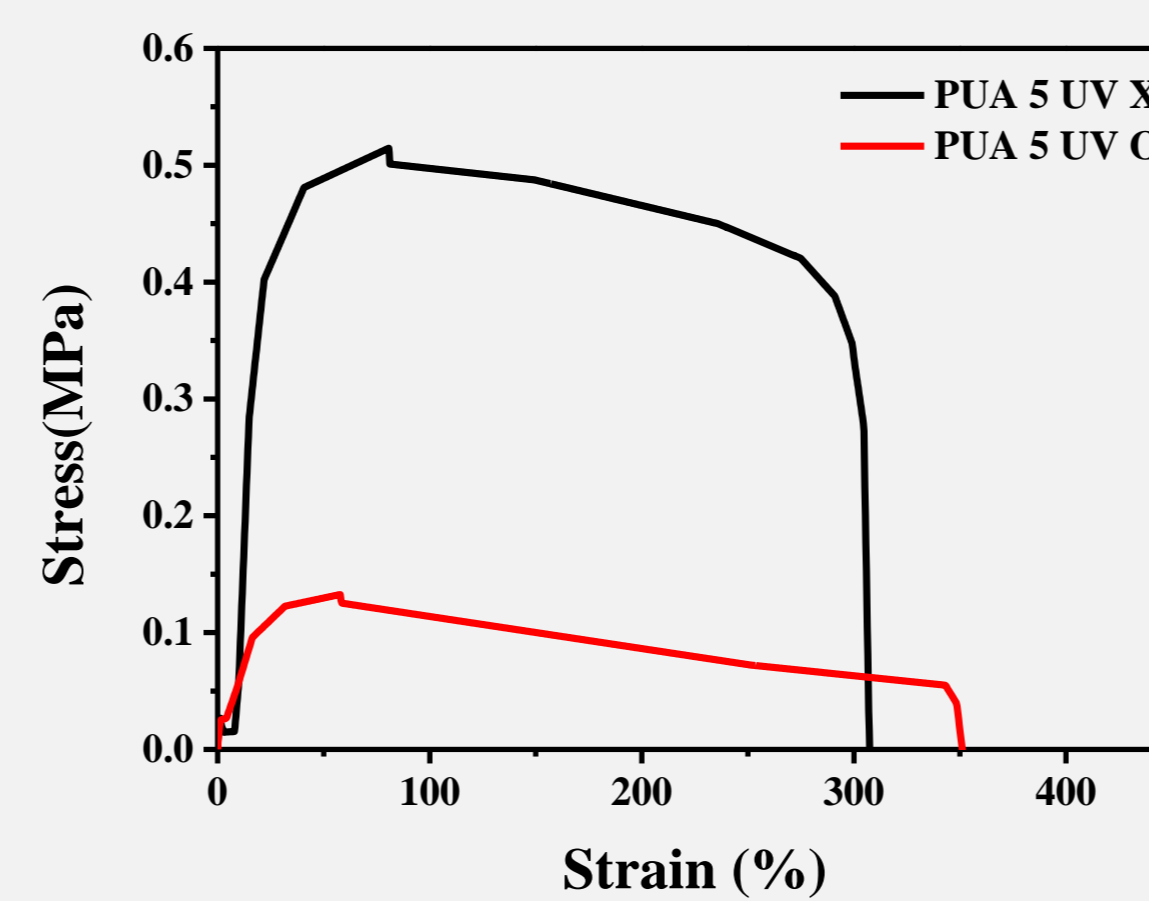


	Stress (MPa)	Strain(%)	Young's Modulus (MPa)
UV X	0.51350	291.278	4.6590
UV O	0.13117	343.127	0.0058

	Stress (MPa)	Strain(%)	Young's Modulus (MPa)
UV X	0.47799	401.197	4.6590
UV O	0.14607	804.029	0.0056

DSC

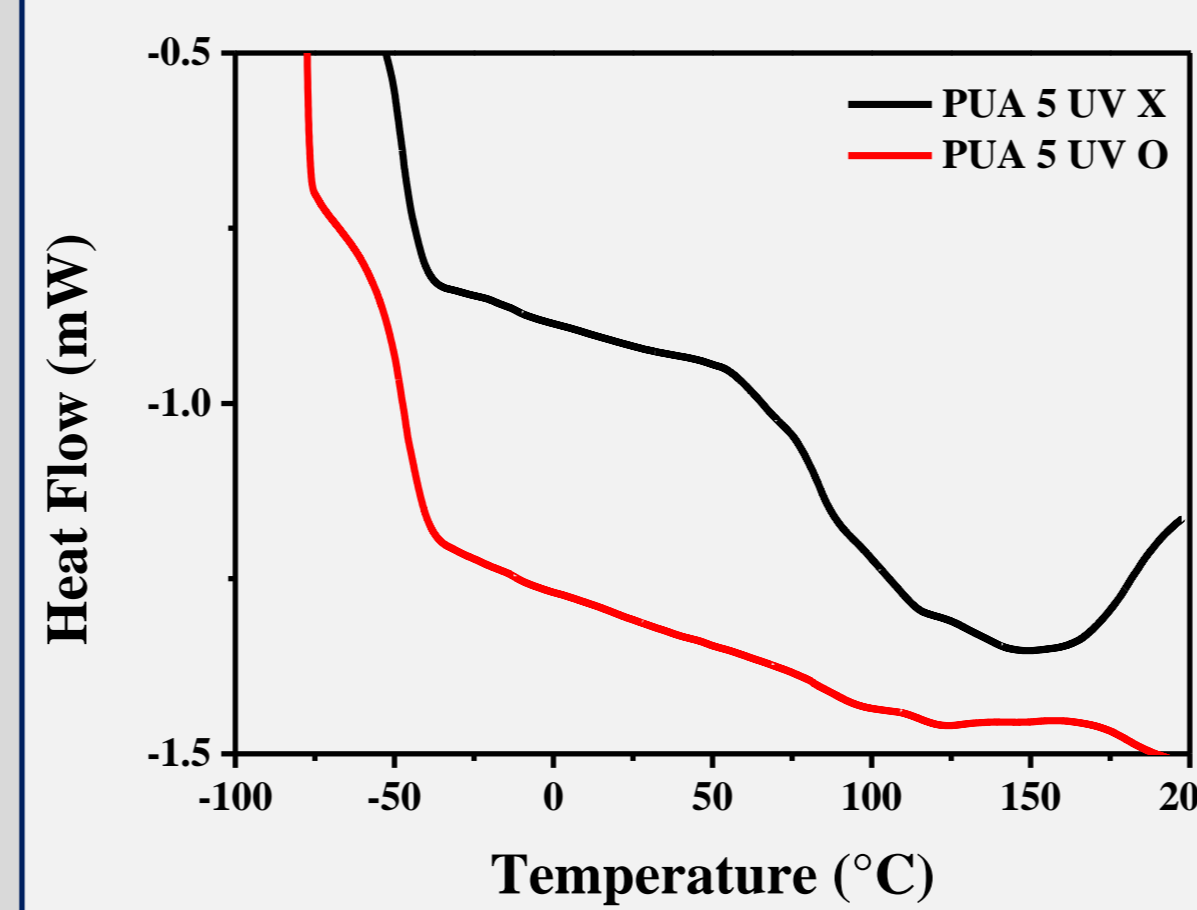

	ΔH_m (J/g)
UV X	1.726
UV O	0.9635

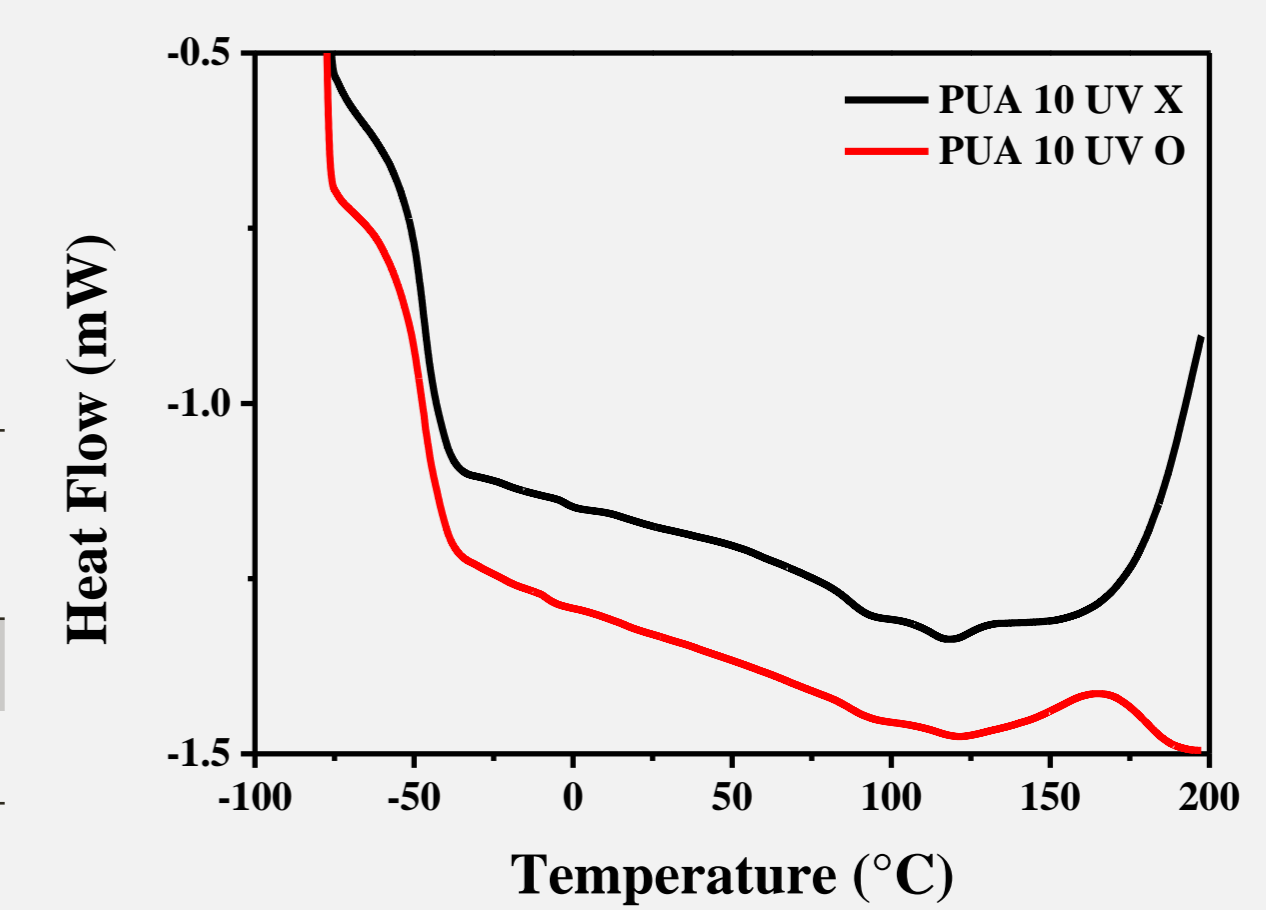

	ΔH_m (J/g)
UV X	1.716
UV O	1.101

Conclusion

- The successful synthesis Acrylate-PU and UV-cured by the photo-initiator
- The special optical properties of the PUA after UV-curing (UV transmittance : 25 to 65%)
- The increase of percentage strain and decrease of tensile strength & Young's modulus after UV-curing
- To demonstrate potential applications of 3D printer materials

Acknowledgement

This work was supported by the National Research Foundation of Korea(NRF) (No. NRF-2016R1D1A1B03933778)